



CUT , STRIP OUTER JACKET AND STRIP INNER CORES FOR MULTI CORE M/C YHPC-CSB2008H03

CUT TO LENGTH



FULL OR HALF STRIP BOTH ENDS

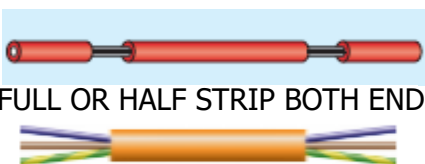

FULL OR HALF STRIP INNER CORES



APPLICABLE WIRE SIZE:-

Single Core or Multi-Cores

Single Core - AWG 10~03 (06~30.0 mm²)

Wire / Cable O.D. Max. – 14.0 mm

Can Strip Inner Cores x 7 on condition

there is no braided or spiral or

Or aluminium foil or drain wire



YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P: +65-91293768 | E-MAIL: yhpc99@gmail.com

WEBSITE:

| CONTACT PERSON – LEE PENG CHAI |

CUT , STRIP OUTER JACKET AND INNER CORES FOR MULTI CORE M/C YHPC-CSB208H03

Technical Data

Model	YHPC-CSB208H03
Function	Cut to length & strip outer jacket on both sides. Also strip inner cores (1 ~ 7 cores) of multi-core cable.
Wire Size	6 ~ 30 mm ² / (awg 10 ~ 03) for Single Core
Wire Size	Outer Jacket Ø14.0mm max. for Multi-core Cable
Guide Pipe Diameter	I.D. max.. Ø16.0 mm,
Outer Jacket Front Strip	10 ~ 150 mm
Outer Jacket Rear Strip	10 ~ 120 mm
No. Of Inner Cores Strip	1 ~ 7 Cores
Inner Core Front Strip	1 ~ 50 mm
Inner Core Rear Strip	1 ~ 50 mm
Intermediate Stripping	N.A.
Cut Length	1.0 ~ 99999 mm
Cut Length Tolerance	0.002*L (L = Cutting Length)
Capacity	2300 Pcs./ Hr. for Single Core / 800 Pcs / Hr. for Multi-core include inner cores.(500 mm length)
Applicable Wire Type	Single Core Wire or Multi Core Cable with Inner Cores
Feed Method	16 wheels drive
Display	Touch screen in English or Chinese
Power Supply	Single Phase AC 220V +/-10%, 50 Hz, 7A To be inform for AC 110V, 60Hz
Dimension (L x W x H)	70 x 45 x 50 cm
Net Weight	70 kgs
HS Code	8479899990
Country Of Origin	China

YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P: +65-91923768 | E-MAIL: yhpc99@gmail.com

WEBSITE:

| CONTACT PERSON – LEE PENG CHAI |